


CSR

Current Sensing

Relay Module

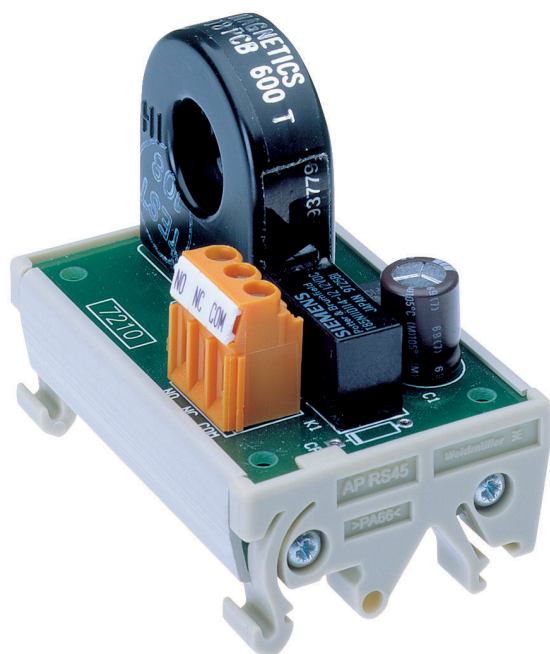

The CSR-25 senses the RMS current to a load such as a motor or a heater and provides a form C (SPDT) relay contact output.

The current level which turns the relay on is based on the number of turns through the current sensing toroidal transformer. A single turn will cause the relay to turn on at approximately 8A. Two turns will lower the level to 4A. The maximum load current is 25A.

Features:

- compact DIN rail mounted package
- 1Amp, 1 form C relay output
- no adjustment or calibration needed
- CSA approved

United States

Weidmuller Inc.
821 Southlake Blvd.
Richmond, Virginia 23236
Telephone: (800) 849-9343
Facsimile: (804) 379-2593
Email: info@weidmuller.com
Website: www.weidmuller.com

Canada

Weidmuller Ltd.
10 Spy Court
Markham, Ontario L3R 5H6
Telephone: (800) 268-4080
Facsimile: (905) 475-2798
Email: info1@weidmuller.ca
Website: www.weidmuller.ca

Mexico

Weidmuller, S.A. de C.V.
5 Sur No. 4311
Col. Huexotitla
72534 Puebla, Pue. Mexico
Telephone: (22) 37 2549
Facsimile: (22) 43 1981
Email: weidmull@acnet.net

CSR

Rated data

Input		
Current	maximum continuous	25A @ 1 turn
	surge (20mS)	100A
Voltage maximum		600Vac (based on insulation of load wire)
Frequency		50/60Hz
Wire diameter maximum (including insulation)		10mm

Output

Contact	arrangement	1 form C (SPDT)
	material	palladium - nickel with gold-rodium overlay
	ratings	1A @ 24Vdc resistive, 0.5A @ 120Vac resistive
	maximum current	1A
	maximum switching	30W or 60VA
	minimum switching	0.01mA @ 10mV
		# of operations @ 1A, 24Vdc: 3 million, @0.5A, 120Vac: 250000



Turn-on/maximum/turn off current*		Turn-on	Maximum	Turn-off
	loops through toroid 1	8A	25A	<1A
	loops through toroid 2	4A	12A	<0.5A
	loops through toroid 3	2.5A	8A	<0.35A
	loops through toroid 4	2A	6A	<0.25A

*specified values are for 20°C. Maximum number of turns is limited only by the outside diameter of the load wire

General

Terminals wire size		26-12AWG
Isolation input-output		based on the insulation of the load wire
Temperature	operating	0-60°C
	storage	-20° - 60°C
Dimensions in mm (length x width x height)		45 x 66 x 60.5

Ordering Data

CSR-25 rail mounted TS35  / TS 32 
 Panel mount version without RS45 housing

Cat.No.

991609
991581

